

7

**IMPORTANT**

Secure feet very firmly onto the cross bars by tightening the screw with the supplied allen key to 2.5 Nm. The screw is located behind the lock tab and will be revealed by pushing it down, see diagram point 2.

8

After completion, check carefully that roof bars are firmly attached.

9

(Optional)

Fit Tips!

**Max. 64 kg**

**THULE ONE KEY SYSTEM**

**THULE**  
Box 69, 330 33 Hillerstorp, SWEDEN  
www.thule.com

**THULE**  
SWEDEN

**SUBARU**  
Legacy, Estate, 03-  
Liberty, Estate, 03-

**GB** Fitting instructions  
**D** Montageanleitung  
**F** Instructions de montage  
**NL** Montage-instructies  
**I** Istruzioni per il montaggio  
**E** Instrucciones de montaje  
**PT** Instruções de Montagem  
**S** Monteringsanvisning  
**FIN** Asennusohje  
**EST** Paigaldusjuhend  
**LAT** Stiprināšanas instrukcija  
**LIT** Pritvirtinimo instrukcijos  
**PL** Instrukcja montażu  
**RU** Инструкции по установке  
**CZ** Návod na montáž

**SK** Návod na montáž  
**SLO** Navodila za pritrdjevanje  
**HR** Uputa za sastavljanje  
**HU** A felszerelés módja  
**GR** Οδηγίες συναρμολόγησης  
**TR** Montaj talimatları  
**中文** 安装说明  
**日本語** 取扱(取付)説明書  
**한국어** 장착 지침  
**ไทย** คำแนะนำการติดตั้ง



**RAPID TRACKER**

**4719**  
1258-1-4719



**Follow me...**





**THULE**  
GB Security regulations  
D Sicherheits-Vorschriften  
F Instructions importantes  
NL Veiligheidsvoorschriften  
I Norme di sicurezza  
E Regles de sécurité  
PT Normas de segurança  
S Säkerhetsföreskrifter  
FIN Turvallisuusohjeet  
EST Ohutusjuhised  
LAT Drošības noteikumi  
LIT Saugumo taisyklės  
PL Wykazy bezpieczeństwa  
RU Инструкции по безопасности  
CZ Návod na montáž  
SK Bezpečnostné predpisy  
SLO Varnostni predpisi  
HR Pravila sigurnosti  
HU Biztonsági előírások  
GR Κανονισμοί Ασφαλείας  
TR Güvenlik kuralları  
中文 安全提示  
日本語 安全注意  
한국어 안전수칙  
ไทย ระเบียบการติดตั้งอย่างปลอดภัย




860

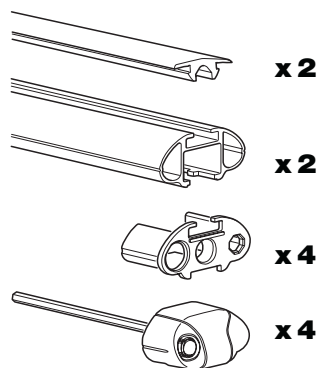


760




4700

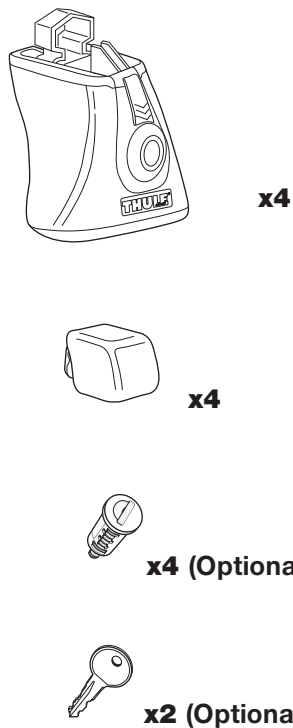

4719

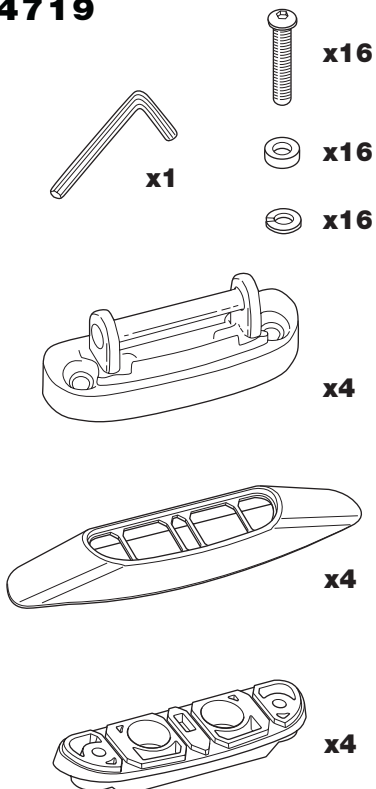


1

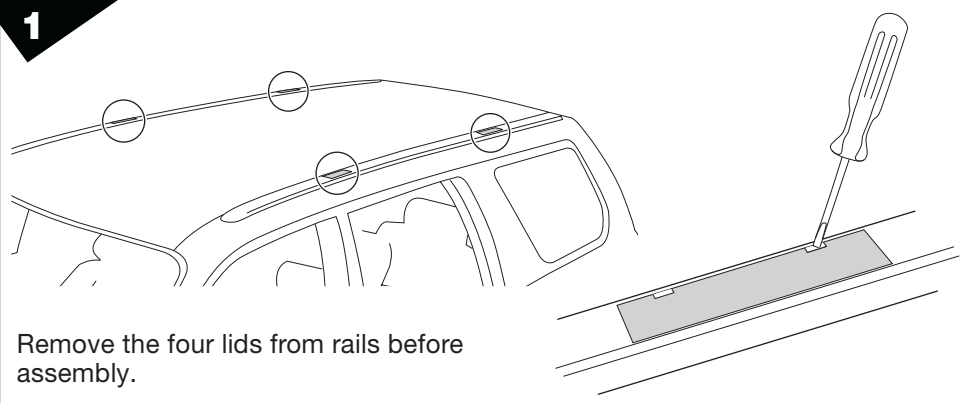

Remove the four lids from rails before assembly.


2

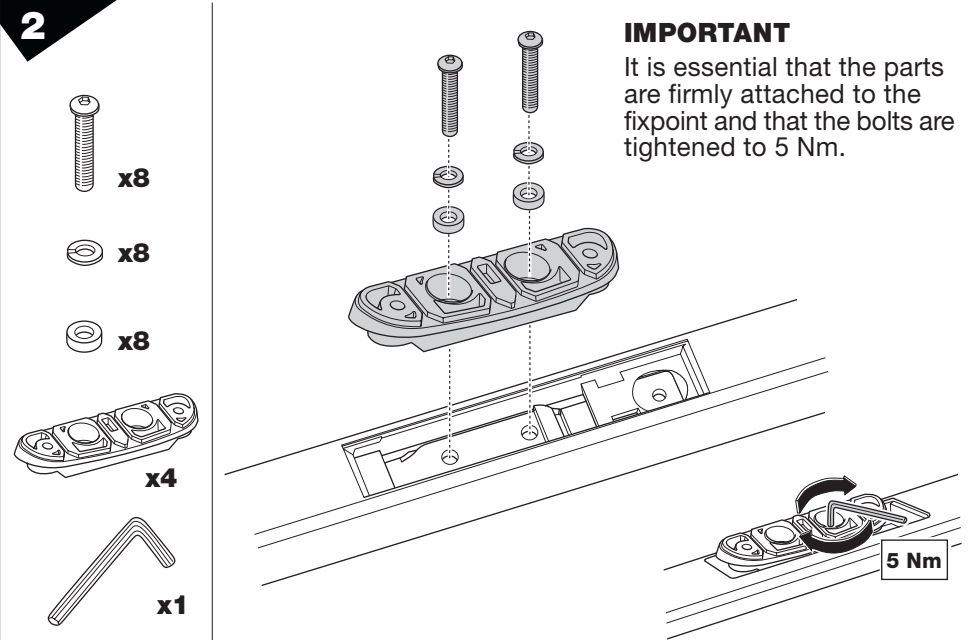

**IMPORTANT**

It is essential that the parts are firmly attached to the fixpoint and that the bolts are tightened to 5 Nm.


3

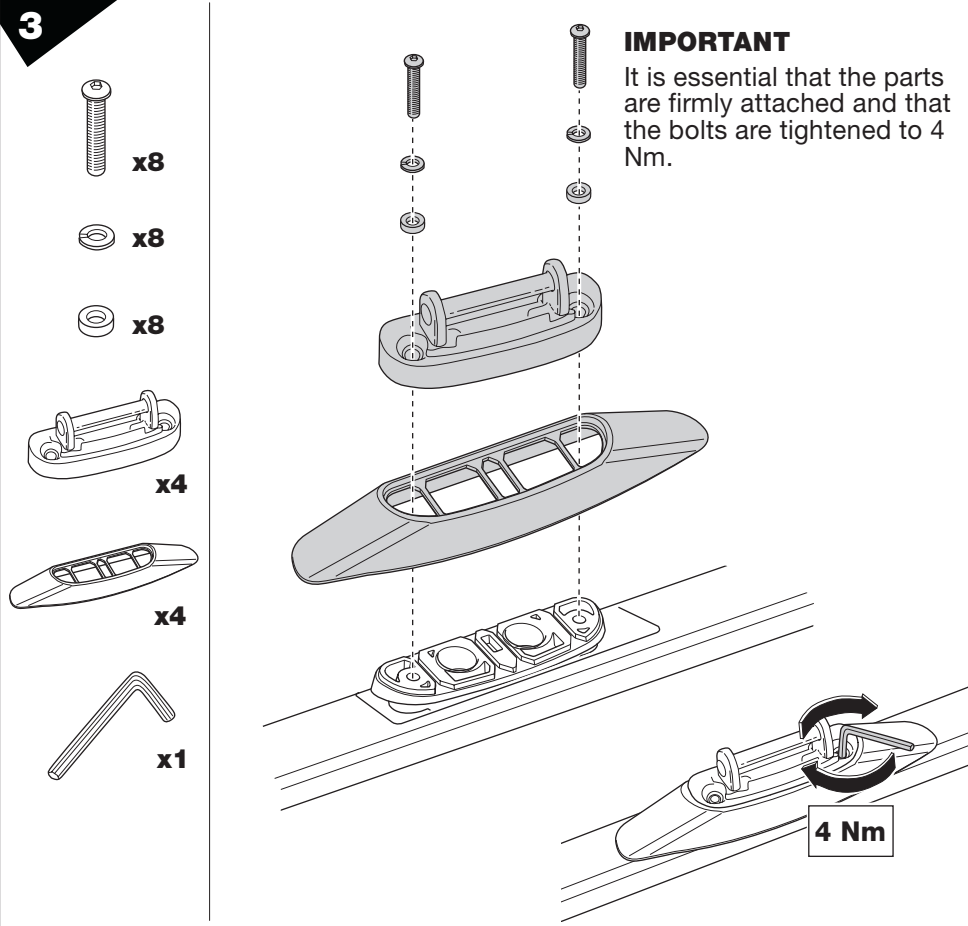

**IMPORTANT**


It is essential that the parts are firmly attached and that the bolts are tightened to 4 Nm.

4

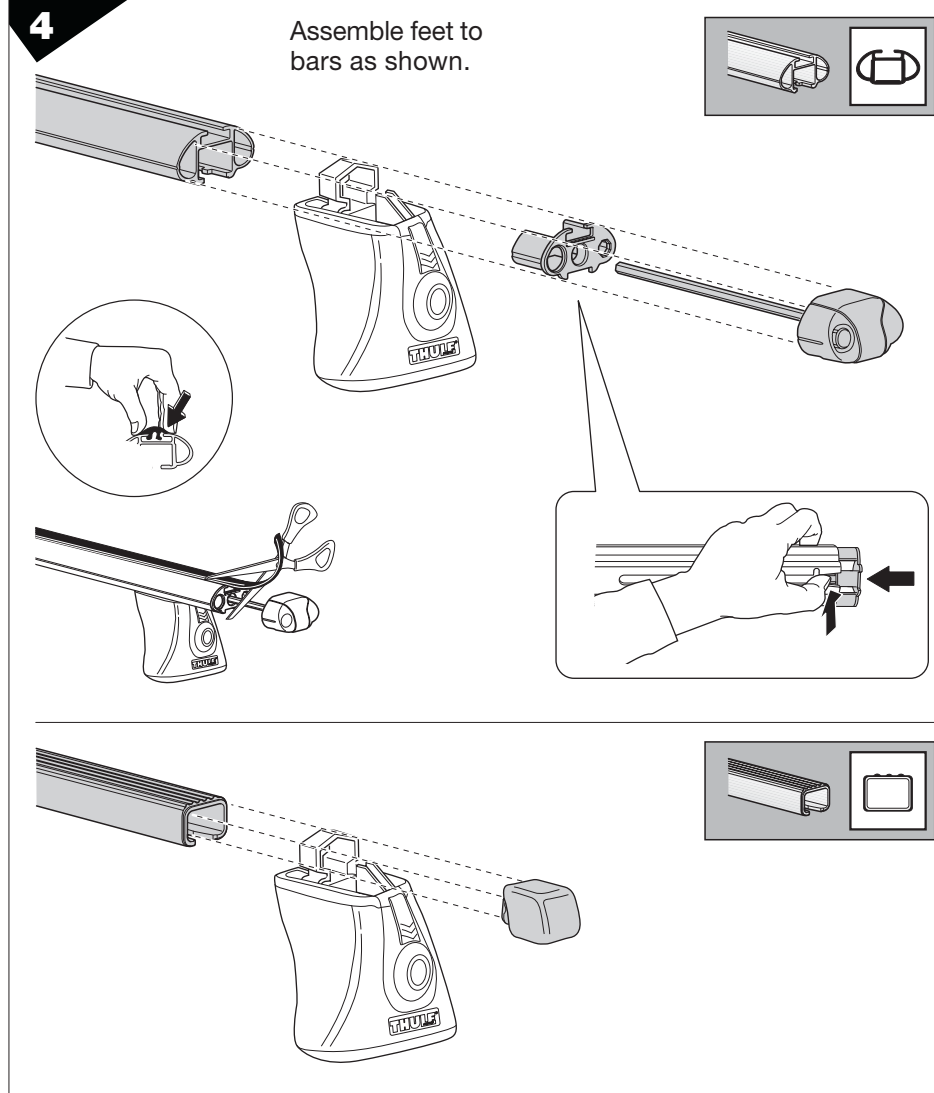


Assemble feet to bars as shown.

5

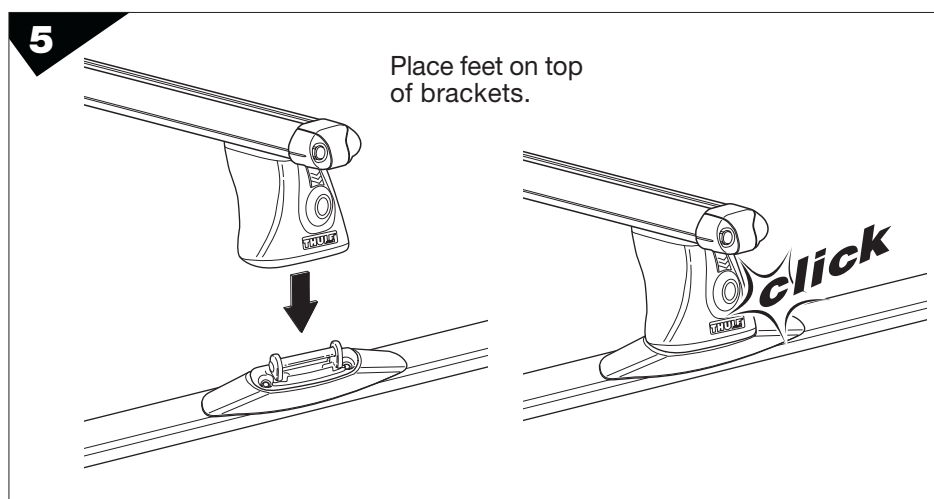

Place feet on top of brackets.

6

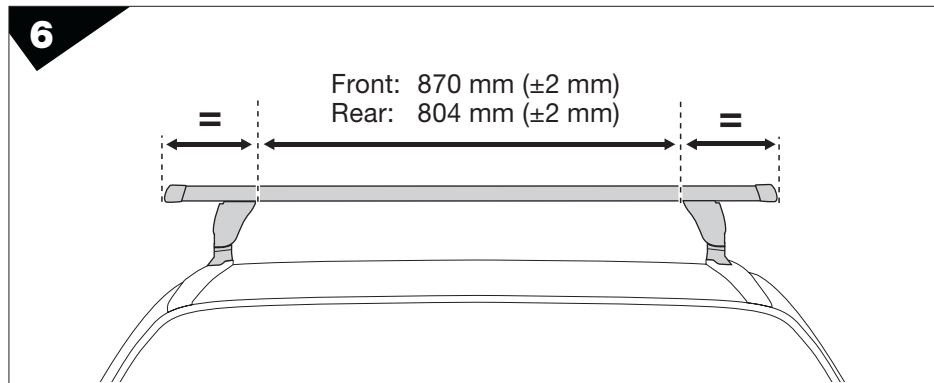

Front: 870 mm (±2 mm)  
Rear: 804 mm (±2 mm)